

Batting Cage Door

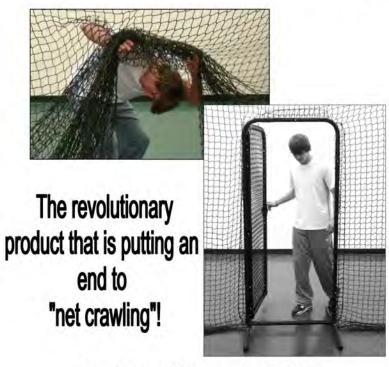

Manufacturers Warranty—One Full Year

Batting Cage Door

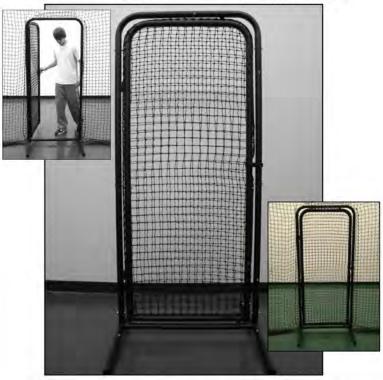

Read and Follow All Safety Rules, Warnings & Assembly Instruction

WARNINGI


Failure to attach your net entirely around the frame of your batting cage door can lead to injury or bodily harm to persons outside the batting cage. Make sure to firmly secure the cage wall netting to your frame without leaving a hole through which a ball may exit the cage.

Always close your batting cage door when balls are being thrown or hit inside the cage net. Never use your batting cage while your batting cage door is open.

Safety Rules:

- 1. Never enter or exit the batting cage while balls are being hit or thrown inside the cage.
- 2. Never use the batting cage while your batting cage door is open.
- 3. Always make sure the batting cage door latch is completely down in the latched position when you close your batting cage door.
- 4. Make sure to read and follow each step in the step -by-step instructions for installation.
- 5. Make sure to properly and securely attach your batting cage wall netting to your door's frame.
- 6. Always inspect the netting connected to your door and the netting of your door to insure that the net is in safe condition with no holes or weak spots. Never use your batting cage if there are holes in your door or if the net around your door's frame has holes or weak spots.











Pictures of the hole cutting procedure.



PAGE 7

Lacing & securing the netting to the door frame.

Step 3














PAGE 6

Assembling the batting cage door and frame.

Step 1



Your door has a sock net.

It is easier to install when two people work together.







Slide the net over the door and lace it securely in place with twine at the bottom of the door.

Choose Location | Step 2 |

You must first choose the location for your doorway into your batting cage. Make sure to choose a location that is to the side of the batter or out of the direct path of where balls are frequently thrown or hit. For example, it is not recommended to put your doorway directly behind the batter in the end of the cage. That location would puts the doorway in the direct path of balls thrown to the batter.

Recommended Locations



Cutting a hole for the doorway



Remove the inner door from the frame Place the frame flush against the cage netting at the desired location.



inches wide exactly In the middle of the frame. The hole will start 6 inches below the top of the frame.

Use scissors to cut

A hole exactly 12





See diagram on page 4



12 inches

Start cutting the hole 6 to 8 inches below the top of the frame. Leave 6 to 8 inches bordering the top and the sides of the hole. —

> Make sure the net is hanging free and flat against the cage. Use the vertical netting as a guide to

make your cut

vertically


straight.

Make a 45 degree cut at both Top corners. Angle the cut directly toward the corner.

> Cut he hole all the way downward to the bottom rope of the cage. It will be laced under the bottom of the door frame.

MAKE SURE TO NOT CUT THE BOTTOM ROPE OF THE CAGE. You will make a cut horizontally along the top of the rope. The cut will go to the inner edge of the frame.

The 6 to 8 inches of net remaining on the top and sides will be lapped over the frame and laced or tied securely in place.





PAGE 5

PAGE 4